

jQuery

- description : jQuery
- author :
- email : dhan@repia.com
- lastupdate : 2020-03-18

[jquery onclick](#)

Ajax

[\[jquery\] , \\$.ajax\(\) .](#)

Autocomplete

[jQuery Autocomplete](#) - jQuery Autocomplete -
[\[jQuery\] Autocomplete\(\)](#)
[autocomplete](#)
[jQuery UI Autocomplete: Highlight Matching Text in jQuery UI Autocomplete](#)

Case Study

Button

가

```
<!doctype html>
<html lang="ko">
  <head>
    <meta charset="utf-8">
    <title>button Test</title>
    <script src="http://code.jquery.com/jquery-1.10.1.min.js"></script>
    <script>
      $( document ).ready( function() {
        $("#button").click(function(){
          alert($(this).attr('value'));
        });
      });
    </script>
  </head>
</html>
```

```

        });
    });
</script>
</head>
<body>
    <button id="button" value="huskdoll"> </button>
</body>
</html>

```

```
$(this).attr('value', ${value});
```

[jQuery](#) [가](#)

Click

How to remove "onclick" with JQuery

```

// Old Way(pre-1.7)
$(selector).attr("onclick", "").unbind("click");
// New Way(1.7+)
$(selector).prop("onclick", null).off("click");

```


[Official docs .click\(\)](#)

Closest(), parents()

[jQuery closest\(\), parents\(\)](#)

DatePicker

DatePicker jQuery widget , UI widget

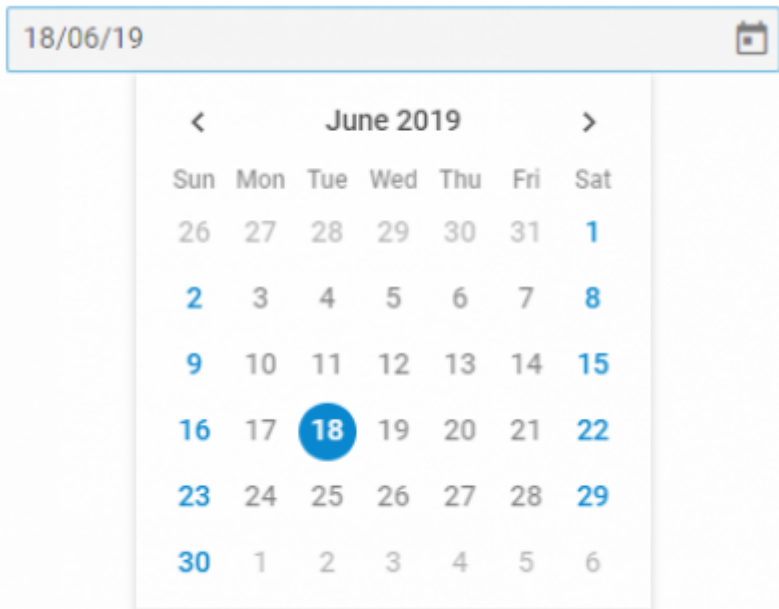

(DatePicker
 3가 File import
)

```
// jQuery UI CSS
<link rel="stylesheet"
href="http://code.jquery.com/ui/1.8.18/themes/base/jquery-ui.css"
type="text/css" />
// jQuery js
<script
src="http://ajax.googleapis.com/ajax/libs/jquery/1.7.1/jquery.min.js"></scri
pt>
// jQuery UI js
<script src="http://code.jquery.com/ui/1.8.18/jquery-ui.min.js"></script>
```

DatePicker

```
$(function() {
  $( "#testDatepicker" ).datepicker({
    buttonImage: "button.png", //
    buttonImageOnly: true //
  });
});
```

DatePicker 가 Option

DatePicker

Each

jQuery - each() \$.each(object, function(index, item){});
 length index

```
var obj = {
  daum: 'http://www.daum.net'
```

```

, naver: 'http://www.naver.com'
};
$.each(obj, function(index, item){
  var result = '';
  result += index + ' : ' + item;
  console.log(result);
})

```

daum : http://www.daum.net
naver : http://www.naver.com

\$(selector).each(function(index, item{});

```

<ul class="list">
  <li>Lorem ipsum dolor sit amet.</li>
  <li>Lorem ior sit amet.</li>
  <li>Lorem ipsum </li>
</ul>

$('.list li').each(function(idex, item){
  $(item).addClass('li_0' + index);
  // or
  $(this).addClass('li_0' + index);
});

```

continue, break

jQuery each loop continue, break

jQuery API - , each()

Format

In jQuery, what's the best way of formatting a number to 2 decimal places?

```

<script type="text/javascript">

  // mini jQuery plugin that formats to two decimal places
  (function($) {
    $.fn.currencyFormat = function() {
      this.each( function( i ) {
        $(this).change( function( e ){
          if( isNaN( parseFloat( this.value ) ) ) return;
          this.value = parseFloat(this.value).toFixed(2);
        });
      });
      return this; //for chaining
    }
  })

```

```

    })( jQuery );

    // apply the currencyFormat behaviour to elements with 'currency' as
    // their class
    $( function() {
        $('.currency').currencyFormat();
    });
</script>
<input type="text" name="one" class="currency"><br>
<input type="text" name="two" class="currency">

```

Json

[\[JavaScript\] JSON](#)

Map function for objects (instead of arrays)

```

myObject = { 'a':1, 'b':2, 'c':3 };
newObject = myObject.map(function (value, label) {
    return value*value;
});

// newObject is now { 'a':1, 'b':4, 'c':9 }

```

Radio

[jQuery select, radio disabled](#)

How to reset radiobuttons in jQuery so that none is checked

```

Old Way (pre-1.6)
$('.input[name="{name}"]').attr('checked', false);
New Way (1.6+)
$('.input[name="{name}"]').prop('checked', false);

```

<https://stackoverflow.com/questions/977137/how-to-reset-radiobuttons-in-jquery-so-that-none-is-checked>

Validate radio buttons

```

var valid = false;
$('#formName').find(':input:radio').each(function(){
    if($(this).prop('checked'))
        valid = true;
});

if(!valid)

```

```
return false;
```

Validate radio buttons with jquery?

[jQuery]

"readonly" "disabled"

String

Converting a value to string in javascript

1. `value.toString()`
2. `"" + value`
3. `String(value)`

<https://2ality.com/2012/03/converting-to-string.html>

Select

text

```
var selected_text = '111111';
$("#S option").filter(function() { return (this.text==selected_text);
}).attr('selected', true);
```

select box

text

Trigger()

- [trigger\(\)](#),

Plugin

- [Jtree](#)
- [jQuery-UI](#)

Tip

- [form submit](#) [input value](#)
-
- [\(TR\)](#)
- [가](#)
-
- [selector \(fast.jsoup\)](#)
-

Troubleshooting

Ref

* [jQuery](#) ,

Case Study(jQuery Note)

- [jquery_note](#)

jquery

html 가

```

$('selector').wrap("<div/>").parent().html(); // div가
$('selector').parent().html(); //

```

, , [eleven](#), [jquery](#)

From:

<https://125.132.25.164/dokuwiki/> -
. - 2023.12

Permanent link:

<https://125.132.25.164/dokuwiki/doku.php?id=wiki:javascript:jquery>

Last update: **2023/01/13 18:44**

